



Empowering Connectivity

Low-profile RFID Antenna - US band
Nominal 9 dBic Gain with
SMA Female Connector

Technical Data Sheet



RA-UC-SFF-252501

Product Information

SKU	RA-UC-SFF-252501
-----	------------------

Description

The RA-US-SFF-252501 is a Radio Frequency Identification Antenna operating in the US-band from 900 MHz to 928 MHz, featuring a nominal gain of 9.0 dBic. It comes with an SMA Female connector output. One crucial feature is the low-profile design coming with a **total antenna thickness of only 14.5 mm**, which makes the well suited for flush-mounted application. The antenna features **an excellent front to back ratio of more than 20 dB**, which makes it stand out from other antennas in the market. This antenna model plays a crucial role in enhancing the overall controlled system and ensures reliable communication, as well as radio frequency (RF) signals. The antenna is circular polarized (CP) and well-suited for applications in Inventory Management, Asset Tracking, Access Control, Vehicle Identification, Healthcare Systems, and Smart Shelves.

Technical Specification

Electrical Specification	
Frequency, Min (GHz)	0.902
Frequency, Max (GHz)	0.928
Patch Type	Aluminum
Ground Type	Aluminum
Gain, Typ (dBic)	9.0
Polarization	RHCP (or LHCP)
Axial Ratio (typ.)	1.5 dB (Covering entire US band)
VSWR	≤ 1.1
Front to Back Ratio	> 20 dB
Power, Max	10 watts
Impedance, (Ohm)	50

Interface	
Output Type	Coaxial
Connector	SMA
Connector Gender	Female
Mechanical Specification	
Cover	Acrylic
Size, H (mm)	14.5
Size, W (mm)	258
Size, L (mm)	258





Empowering Connectivity

Low-Profile RFID Antenna - US band
Nominal 9.0 dBic Gain with
SMA Female Connector




Technical Data Sheet

RA-UC-SFF-252501

Additional Information

Application	enhance overall system supervision and control assigned at Dock doors, portals, outdoor gates	Solution for	Inventory Management Asset Tracking Access Control Vehicle Identification Healthcare Systems Smart Shelves
-------------	---	--------------	---

Outline Drawing

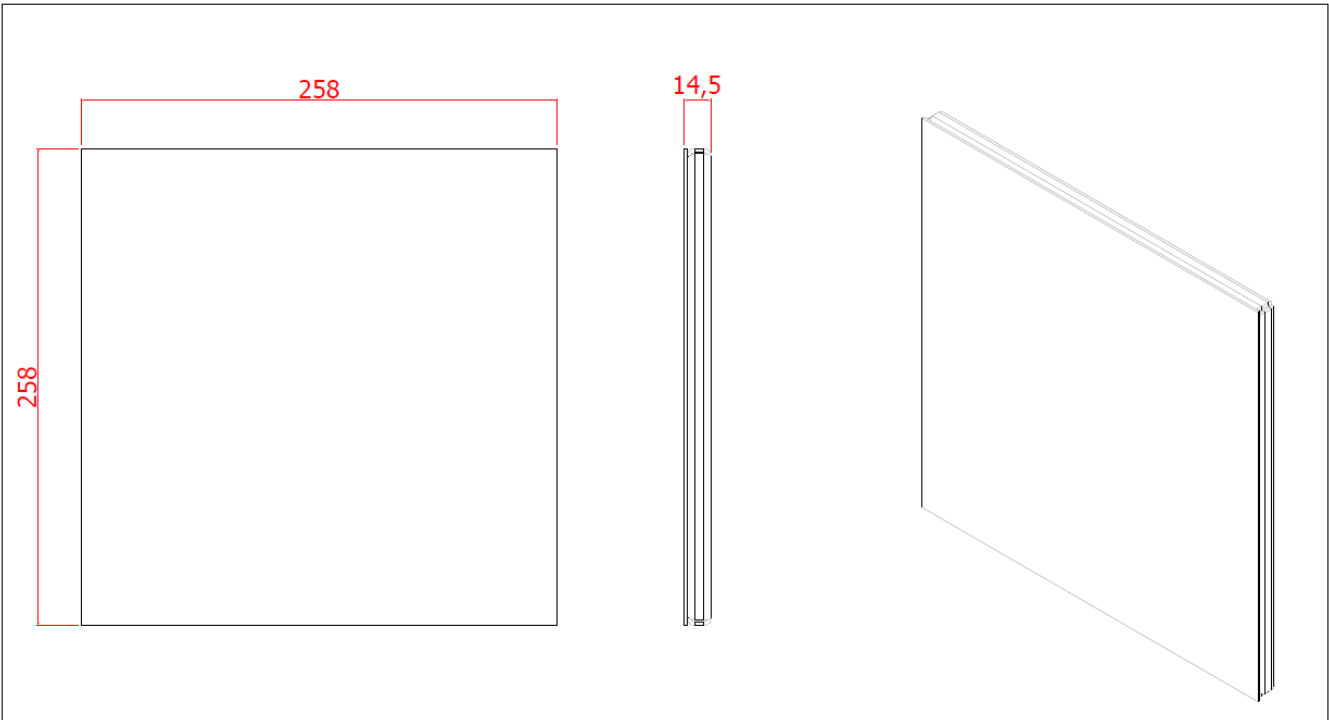

THE INFORMATION CONTAINED HEREIN SHALL NOT BE REPRODUCED OR DISSEMINATED WITHOUT THE PRIOR WRITTEN PERMISSION OF NEXTWAVES VIETNAM THIRD ANGLE PROJECTION DIMENSIONS ARE IN MILLIMETERS		CÔNG TY TNHH NEXTWAVES INDUSTRIES AM 05-07-09b Lot, Street No. 10, Tan Thuan Export Processing Zone, Tan Thuan Dong Ward, District 7, Ho Chi Minh City Website: Nextwaves.industries Phone: +84 93 8888 373	TOL:		DATE:	
			DESIGN BY:	DRAWN BY: Hoàng_Phan	CHECKED BY:	APPROVED BY:
			MATERIAL:		PROJECT:	
			QUANTITY:		NAME: RA-UC-SFF-252501	



Empowering Connectivity


RFID Antenna - US band
Nominal 9.0 dBic Gain with
SMA Female Connector



Technical Data Sheet

RA-UC-SFF-252501

Typical Test Results – Reflection Coefficient and VSWR

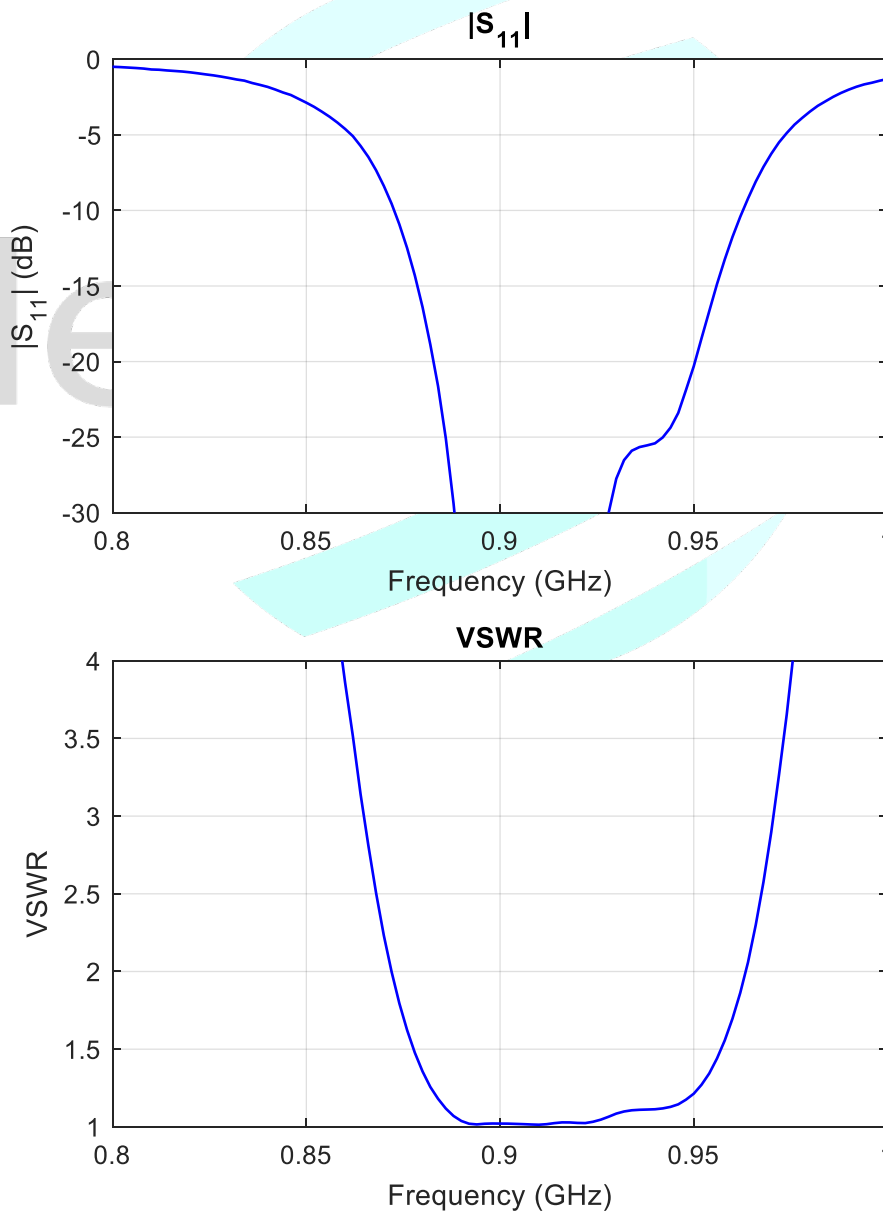



Empowering Connectivity


RFID Antenna - US band
Nominal 9.0 dBi Gain with
SMA Female Connector



Technical Data Sheet

RA-UC-SFF-252501

Typical Test Results – Axial Ratio

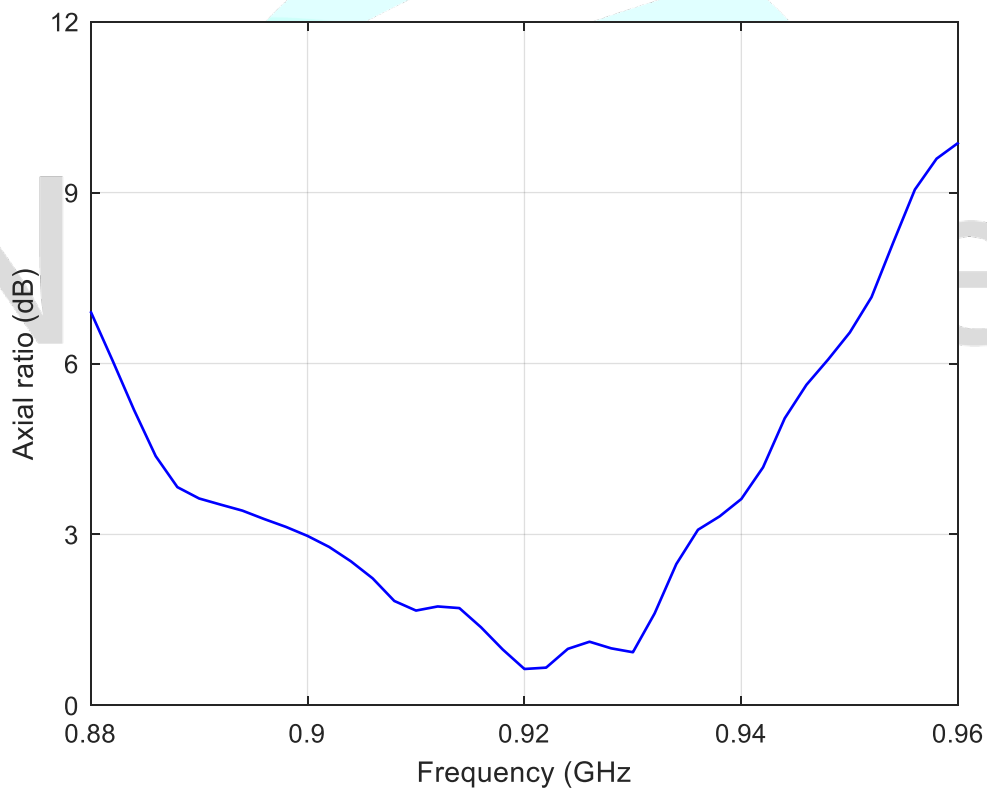



Empowering Connectivity

RFID Antenna - US band
Nominal 9.0 dBi Gain with
SMA Female Connector




Technical Data Sheet

RA-UC-SFF-252501

Typical Test Results

Measured normalized radiation pattern at 915 MHz

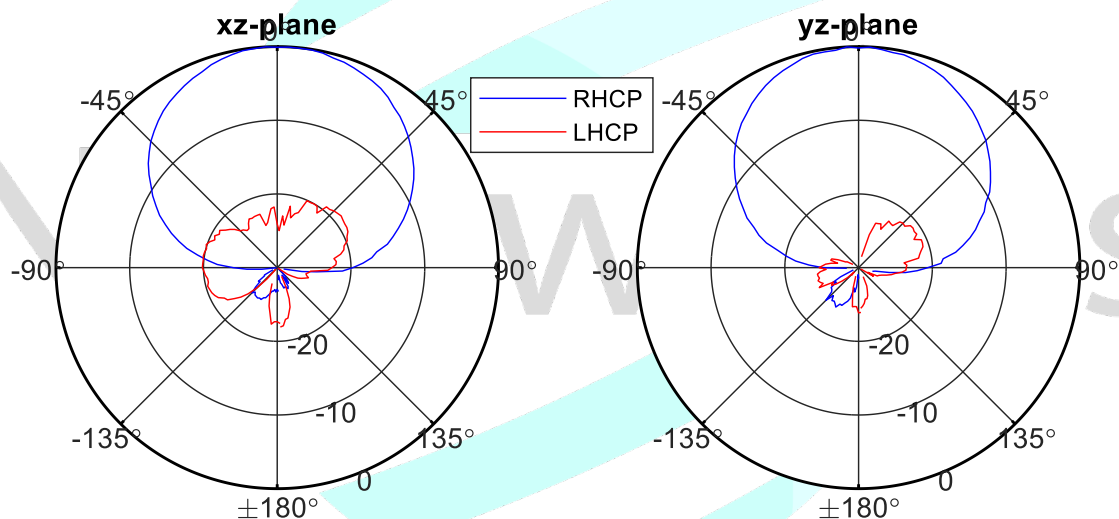



Empowering Connectivity

RFID Antenna - US band
Nominal 9 dBc Gain with
SMA Female Connector



Technical Data Sheet

RA-UC-SFF-252501

Typical Test Results

